

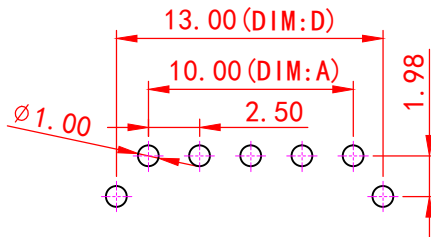
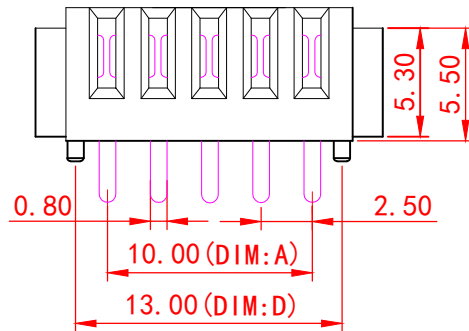


RoHS
Compliant

SYMBOL	REVISION	APPROVAL	DATE

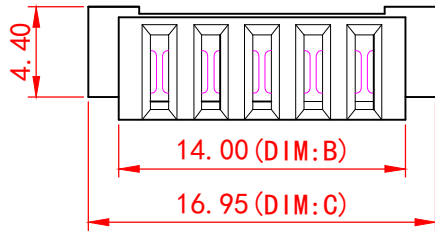

Recommended P. C. B Layout
Layout Tolerance=+/-0.05mm

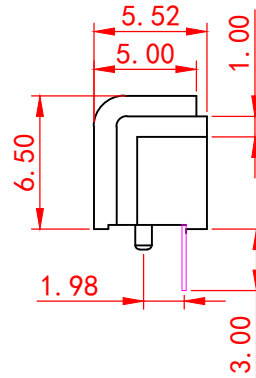

Specification
Current Rating: 5A
Instant Current: 7A
Contact Resistance: 30mΩ
Insulation Resistance: 100MΩ
Dielectric Voltage: 500V
Operdting Temperature: -40° ~105°

No:of pins	Dimension			
	DIM. A	DIM. B	DIM. C	DIM. D
02	2.50	6.50	9.45	5.50
03	5.00	9.00	11.95	8.00
04	7.50	11.50	14.45	10.50
05	10.00	14.00	16.95	13.00
06	12.50	16.50	19.45	15.50
07	15.00	19.00	21.95	18.00
08	17.50	21.50	24.45	20.50
09	20.00	24.00	26.95	23.00
10	22.50	26.50	29.45	25.50
11	25.00	29.00	31.95	28.00
12	27.50	31.50	34.45	30.50
13	30.00	34.00	36.95	33.00
14	32.50	36.50	39.45	35.50
15	35.00	39.00	41.95	38.00
16	37.50	41.50	44.45	40.50

2	HOUSING	NYLON 9T	1	BLACK
1	CONTACT TERMINAL	PHOSPHOR BRONZE	5	Au PLATED
NO.	PARTS	MATERIAL	QTY.	FINISHING

广东诺德电子科技有限公司

PART NAME	CONNECTOR		DRAWING	Y. C. Zhang	DWG. No.	
PART NO.	ND-B01F-C-S2 系列		CHECK	G. C. Chen	REV.	A1
UNIT : mm	TOLERANCE	UP TO 5 ±0.2 ABOVE 5 ~30 ±0.3 ABOVE 30 ±0.5 ANGLE ±3°	APPROVAL		DATE	08-08-2018
	OTHERWISE		SCALE	2:1	PAGE	1 OF 1

COPYRIGHT RESERVED, PLEASE DO NOT COPY.