
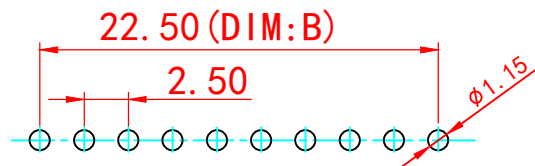
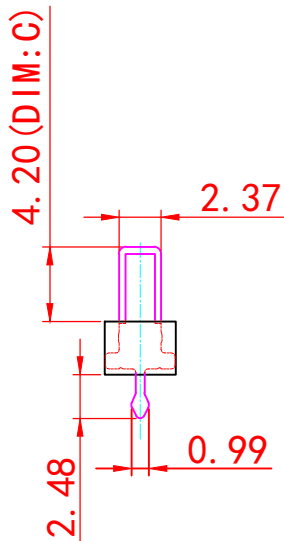
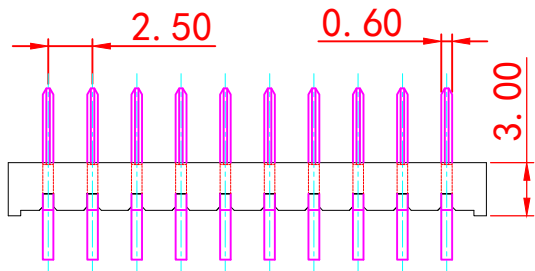


RoHS  
Compliant

SYMBOL	REVISION	APPROVAL	DATE

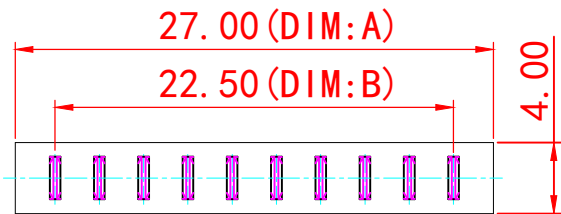

Recommended P. C. B Layout  
Layout Tolerance=+/-0.05mm

Specification  
 Current Rating : 5A  
 Instant Current : 7A  
 Contact Resistance : 30mΩ  
 Insulation Resistance : 100MΩ  
 Dielectric Voltage : 500V  
 Operdting Temperature : -40° ~105°

No. of Pins	Dimension	
	DIM. A	DIM. B
02	7.00	2.50
03	9.50	5.00
04	12.00	7.50
05	14.50	10.00
06	17.00	12.50
07	19.50	15.00
08	22.00	17.50
09	24.50	20.00
10	27.00	22.50
11	29.50	25.00
12	32.00	27.50
13	34.50	30.00
14	37.00	32.50
15	39.50	35.00
16	42.00	37.50

DIM:C (刀片长)
4.20
5.80
6.00
7.00
8.00
8.50
9.00
9.50

NO.	PARTS	MATERIAL	QTY.	FINISHING
2	HOUSING	NYLON 9T	1	BLACK
1	CONTACT TERMINAL	C2680	10	Au PLATED

广东诺德电子科技有限公司

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME	CONNECTOR		DRAWING	Y. C. Zhang	DWG. No.
PART NO.	ND-B01M-R1 系列		CHECK	G. C. Chen	REV. A1
UNIT : mm	TOLERANCE	UP TO 5 ±0.2 ABOVE 5 ~30 ±0.3 ABOVE 30 ±0.5 ANGLE ±3°	APPROVAL	DATE	08-08-2018
	OTHERWISE		SCALE	2:1	PAGE 1 OF 1