





RoHS  
Compliant

SYMBOL	REVISION	APPROVAL	DATE

Material	
Current Rating :	5A
Instant Current	7A
Contact Resistance	30mΩ
Insulation Resistance	100MΩ
Dielectric Voltage	500V
Operating Temperature	-40° ~105

No. of Pins	Dimension	
	DIM. A	DIM. B
02	7.00	2.50
03	9.50	5.00
04	12.00	7.50
05	14.50	10.00
06	17.00	12.50
07	19.50	15.00
08	22.00	17.50
09	24.50	20.00
10	27.00	22.50
11	29.50	25.00
12	32.00	27.50
13	34.50	30.00
14	37.00	32.50
15	39.50	35.00
16	42.00	37.50

DIM C 刀片长
4.20
5.80

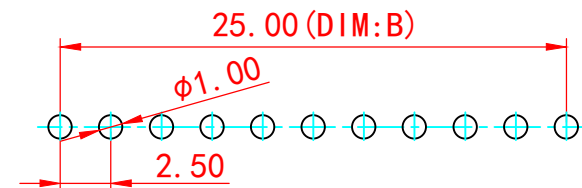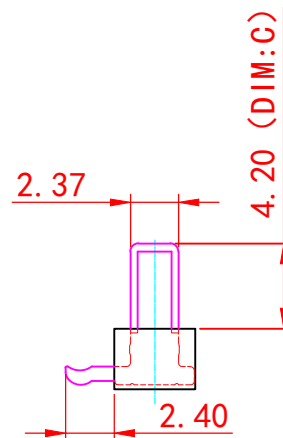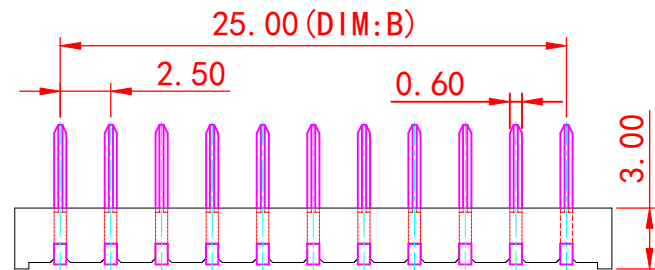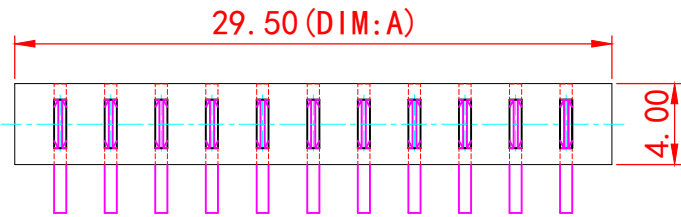

Recommended P. C. B Layout  
Layout Tolerance=+/-0.05mm

2	HOUSING	NYLON 9T	1	BLACK
1	CONTACT TERMINAL	C2680	11	Au PLATED
NO.	PARTS	MATERIAL	QTY.	FINISHING

广东诺德电子科技有限公司

PART NAME	CONNECTOR		DRAWING	Y. C. Zhang	DWG. No.	
PART NO.	ND-B01M-R4 系列		CHECK	G. C. Chen	REV.	A1
UNIT:	TOLERANCE	UP TO 5 ±0.2 ABOVE 5 ~30 ±0.3 ABOVE 30 ±0.5 ANGLE ±3°	ANGLE	APPROVAL	DATE	08-08-2018
	mm	OTHERWISE	0° ±3°	SCALE	PAGE	1 OF 1

COPYRIGHT RESERVED, PLEASE DO NOT COPY.