

RoHS  
Compliant

| SYMBOL | REVISION | APPROVAL | DATE |
|--------|----------|----------|------|
|        |          |          |      |
|        |          |          |      |
|        |          |          |      |

备注:


1. 产品规格:

- 1-1. 额定电压: 30V
- 1-2. 耐电压: 1000V AC MIN.
- 1-3. 接触阻抗: 30mΩ MAX. INITIAL; 40mΩ MAX AFTER 3000 CYCLES
- 1-4. 绝缘电阻: 1000MΩ MIN
- 1-5. 工作温度: -25°C TO +80°C

2. 材质:

- 2.1 胶芯: PA9T UL94V-0/LCP BLACK
- 2.2 端子: 合金铜, 镍底, GOLD
- 3. 所用材质须符合RoHS要求

| PART NUMBER     | PIN   | Dim.A | Dim.B | Dim.C |
|-----------------|-------|-------|-------|-------|
| ND-Z01F-2Pin-S0 | 02pin | 10.70 | 10.20 | 5.00  |
| ND-Z01F-3Pin-S0 | 03pin | 15.70 | 15.20 | 10.00 |
| ND-Z01F-4Pin-S0 | 04pin | 20.70 | 20.20 | 15.00 |
| ND-Z01F-5Pin-S0 | 05pin | 25.70 | 25.20 | 20.00 |

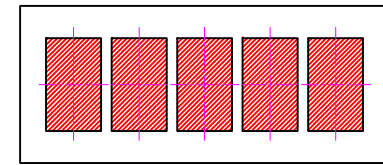

RECOMMENDED P.C. BOARD LAYOUT

广东诺德电子科技有限公司

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

|              |                        |               |      |         |          |           |      |            |  |        |        |
|--------------|------------------------|---------------|------|---------|----------|-----------|------|------------|--|--------|--------|
| PART NAME    |                        | CONNECTOR     |      | DRAWING |          | M.M.Zhang |      | DWG.No.    |  | JD-009 |        |
| PART NO.     |                        | ND-Z01F-S0 系列 |      | CHECK   |          | G.C.Chen  |      | REV.       |  | A1     |        |
| UNIT :<br>mm | TOLERANCE<br>OTHERWISE | UP TO 5       | ±0.2 | ANGLE   | APPROVAL | SCALE     | DATE | 01-07-2016 |  | PAGE   | 1 OF 1 |
|              |                        | ABOVE 5 ~ 30  | ±0.3 |         |          |           |      |            |  |        |        |
|              |                        | ABOVE 30      | ±0.5 | σ±3     |          | 2:1       |      |            |  |        |        |