
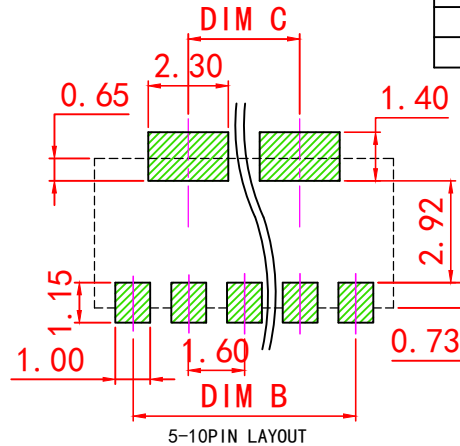






RoHS
Compliant

SYMBOL	REVISION	APPROVAL	DATE





SPECIFICATIONS

- ELECTRICAL CHARACTERISTICS:
 - 1-1. RATING: DC 12V 1A
 - 1-2. CONTACT RESISTANCE: 50mΩ MAX (INITIAL)
 - 1-3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE
 - 1-4. INSULATION RESISTANCE: 500MΩ MIN, MEASURED BY 500V DC
- FORCE: 0.6mm CONTACT TRAVEL: 600gf Max.
- LIFE TEST: MECHANICAL LIFE TEST 5,000 CYCLES.
- TEMPERATURE RISE : 30° C MAX

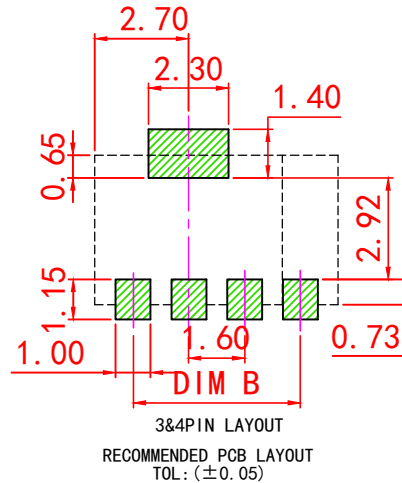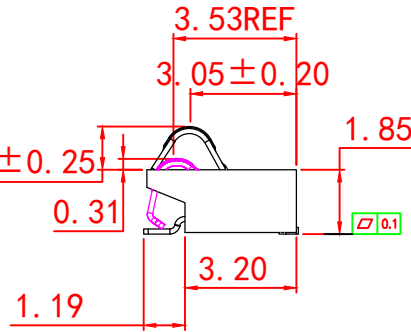

型号规格	DIM A	DIM B	DIM B
ND-3P-1.6PH-3.1H	4.80	3.20	0
ND-4P-1.6PH-3.1H	6.40	4.80	0
ND-5P-1.6PH-3.1H	8.00	6.40	3.20
ND-6P-1.6PH-3.1H	9.60	8.00	4.80
ND-7P-1.6PH-3.1H	11.20	9.60	6.40
ND-8P-1.6PH-3.1H	12.80	11.20	8.00
ND-9P-1.6PH-3.1H	14.40	12.80	9.60
ND-10P-1.6PH-3.1H	16.00	14.40	11.20



2	HOUSING	LCP	1	GRAY
1	CONTACT TERMINAL	PHOSPHOR BRONZE	4	Au PLATED
NO.	PARTS	MATERIAL	QTY.	FINISHING

广东诺德电子科技有限公司

PART NAME	CONNECTOR	DRAWING	Y. C. Zhang	DWG. No.	
PART NO.	ND-1.6PH-3.1H系列	CHECK	G. C. Chen	REV.	A1
UNIT: mm	TOLERANCE	X. ±0.15 X.* ±1°	APPROVAL	DATE	06-06-2018
	OTHERWISE	X.X ±0.10 X.X* ±0.5° X.XX ±0.05 X.XX ±0.05° X.XXX ±0.005 X.XXX ±0.005°	SCALE	PAGE	1 OF 1

COPYRIGHT RESERVED, PLEASE DO NOT COPY.